

## Anchor channel HAC-30



### Base materials

- Concrete (cracked)
- Concrete (uncracked)

### Applications

- Installation of building services in the basement backbone, risers and backbones for each level
- Floor or ceiling grid systems for applications with demanding requirements in terms of flexibility and dust or noise reduction e.g. semiconductor manufacturing or showrooms
- Main runs of pipes or ducts for heating, plumbing, ventilation and air conditioning

### Advantages

- Serrated channel is compatible with Hilti MQ41 installation components
- Faster installation of building services than with traditional anchor fastening methods
- Dustless and noiseless fastening method



### Technical data

|                            |   |
|----------------------------|---|
| <b>Anchor type</b>         | Anchor channel                          |
| <b>Material, corrosion</b> | Steel, sherardized / hot-dip galvanized |
| <b>Width</b>               | 41 mm                                   |
| <b>Height</b>              | 26 mm                                   |

### Approvals

|                                   |  |
|-----------------------------------|--|
| ETA<br>Fire resistance<br>Fatigue | ETA-11/0006 for HAC (ETAG -, Option -) |
|-----------------------------------|--|

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

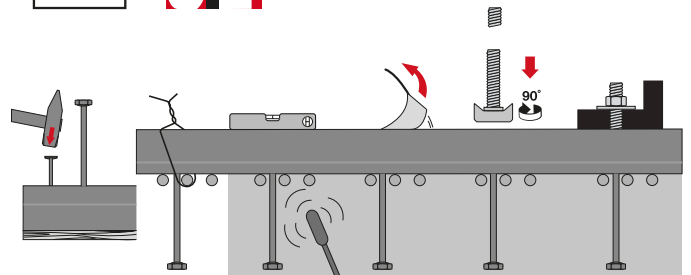

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

| Ordering designation | Length | Number of anchors | Anchor distance | Sales pack quantity | Item number          |
|----------------------|--------|-------------------|-----------------|---------------------|----------------------|
| HAC-30 68/200 F      | 200 mm | 2                 | 150 mm          | 1 pc                | 431889 <sup>1)</sup> |
| HAC-30 68/250 F      | 250 mm | 2                 | 200 mm          | 1 pc                | 431890 <sup>1)</sup> |
| HAC-30 68/300 F      | 300 mm | 2                 | 250 mm          | 1 pc                | 431891 <sup>1)</sup> |
| HAC-30 68/550 F      | 550 mm | 3                 | 250 mm          | 1 pc                | 431892 <sup>1)</sup> |

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.