

## Sleeve anchor (hex head) HLC-H



## Base materials

- Concrete (uncracked)
- Masonry (solid)

## Applications


- Suitable for a large range of temporary applications, fastening small items etc.

## Advantages

- Variety of lengths and sizes for a multitude of applications
- Pre-assembled anchor for fast, easy installation
- Ideal for through-fastening applications

## Technical data

<b>Material composition</b>	Steel, 8.8 grade, zinc-plated (min. 5 $\mu\text{m}$ )
<b>Head configuration</b>	Hex head
<b>Anchor length</b>	40 mm
<b>Anchor size</b>	8 mm
<b>Base plate clearance hole</b>	10 mm

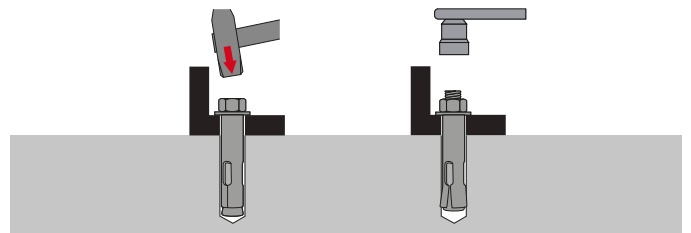

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Drill bit diameter	Required tightening torque	Wrench/nut size	Wrench size	Sales pack quantity	Item number
<b>HLC-H 8x40/10</b>	8 mm	8 Nm	10 mm	10 mm	100 pc	<b>385836<sup>1)</sup></b>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.