


Sleeve anchor (counter sunk) HLC-SK

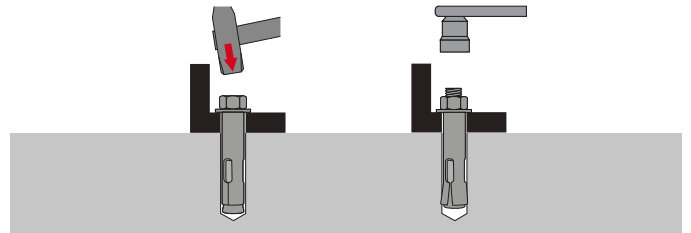

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Base materials

- Concrete (uncracked)
- Masonry (solid)

Applications

- Suitable for various base materials thanks to the expansion principle

Advantages

- Variety of lengths and sizes for a multitude of applications
- Pre-assembled anchor for fast, easy installation
- Suitable for various base materials thanks to the expansion principle

Technical data

Material composition	Steel, 8.8 grade, zinc-plated (min. 5 µm)
Head configuration	Countersunk
Anchor length	130 mm
Anchor size	10 mm
Base plate clearance hole	12 mm

Ordering designation	Drill bit diameter	Required tightening torque	Sales pack quantity	Item number
HLC-SK 10x130/95	10 mm	25 Nm	25 pc	385865¹⁾

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.