

## Impact anchor HPS-1 R



### Base materials

- Concrete (aerated)
- Concrete (uncracked)
- Masonry (hollow)
- Masonry (solid)

### Applications


- Anchoring light frames, battens and profiles in hollow and solid base materials
- Corrosion-resistant for outdoor use
- Fastening components for electrical and plumbing installations

### Advantages

- Stainless steel hammer-driven screw for outdoor use
- Quick impact installation using a hammer
- The hammer-driven screw can also be driven or unscrewed using a screwdriver

### Technical data

<b>Material composition</b>	Body: polyamide, Screw: 304 stainless steel
<b>Head configuration</b>	Countersunk Phillips

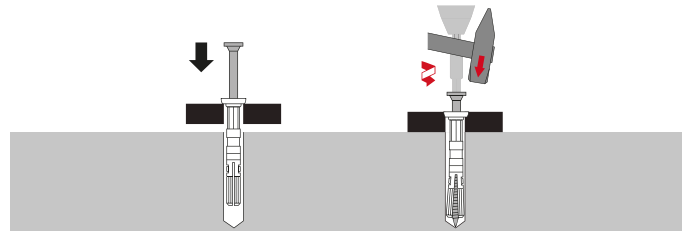

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Drill bit diameter	Anchor length	Bit size	Sales pack quantity	Item number
HPS-1 R 5/10x30	5 mm	32 mm	PZ2	200 pc	230524
HPS-1 R 6/5x30	6 mm	32 mm	PZ2	150 pc	260359 <sup>1)</sup>
HPS-1 R 6/15x40	6 mm	42 mm	PZ2	100 pc	260360
HPS-1 R 6/25x50	6 mm	52 mm	PZ2	100 pc	260361
HPS-1 R 6/40x65	6 mm	67 mm	PZ2	100 pc	260362
HPS-1 R 8/10x40	8 mm	43 mm	PZ2	100 pc	260363
HPS-1 R 8/30x60	8 mm	63 mm	PZ2	50 pc	260364
HPS-1 R 8/40x70	8 mm	73 mm	PZ2	50 pc	230528 <sup>1)</sup>
HPS-1 R 8/60x90	8 mm	93 mm	PZ2	50 pc	260365
HPS-1 R 8/80x110	8 mm	113 mm	PZ2	50 pc	260366 <sup>1)</sup>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.