

**Standard stud anchor HSV**



**Base materials**


- Concrete (uncracked)

**Applications**

- Wide range of applications in uncracked concrete

**Advantages**

- Two embedment depths for a wide range of fastening thicknesses
- Setting mark for easy checking of correct installation depth
- Raised impact section prevents thread damage during installation

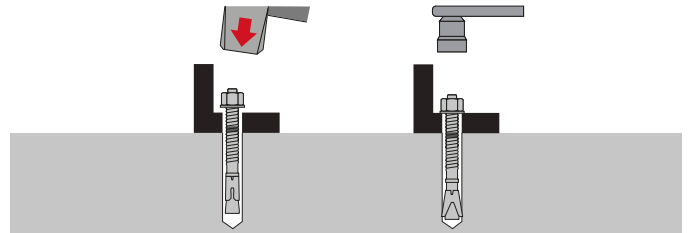

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

**Technical data**

<b>Material composition</b>	Steel, zinc-plated (min. 5 µm)
<b>Head configuration</b>	Externally threaded

Ordering designation	Drill bit diameter	Anchor size	Anchor length	Base plate clearance hole	Required tightening torque	Socket size	Wrench size	Sales pack quantity	Item number
HSV M8x75	8 mm	M8	75 mm	9 mm	15 Nm	13 mm	13 mm	100 pc	2041604
HSV M10x90	10 mm	M10	90 mm	12 mm	30 Nm	17 mm	17 mm	50 pc	2041605
HSV M12x100	12 mm	M12	100 mm	14 mm	50 Nm	19 mm	19 mm	30 pc	2041607
HSV M12x110	12 mm	M12	110 mm	14 mm	50 Nm	19 mm	19 mm	30 pc	2041608 <sup>1)</sup>
HSV M12x120	12 mm	M12	120 mm	14 mm	50 Nm	19 mm	19 mm	30 pc	2041609
HSV M12x150	12 mm	M12	150 mm	14 mm	50 Nm	19 mm	19 mm	25 pc	2041610 <sup>1)</sup>
HSV M16x120	16 mm	M16	120 mm	18 mm	100 Nm	24 mm	24 mm	16 pc	2041611
HSV M16x140	16 mm	M16	140 mm	18 mm	100 Nm	24 mm	24 mm	16 pc	2041612

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.