

Universal plastic anchor HUD-L



Base materials

- Concrete (aerated)
- Concrete (uncracked)
- Drywall
- Masonry (hollow)
- Masonry (solid)

Applications


- Refurbishing work on thick layers of plaster and on double-clad drywall panels, e.g. battens, junction boxes, cables, light switches, lights, brackets, signs, shelves, plumbing fixtures, wall brackets etc.
- Extra-long plastic anchor for refurbishment and renovation work or drywall installation

Advantages

- Extra long, for bridging thick layers of plaster up to 30 mm
- Forms a "knot" when set in hollow materials and double-clad drywall panels
- The screw is guided with full control, no breaking through or wandering out of the anchor body

Technical data

Material composition	Body: polyamide
Head configuration	n/a

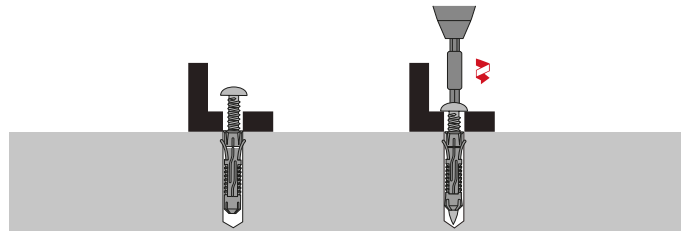

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor length	Sales pack quantity	Item number
HUD-L 6x50	6 mm	47 mm	400 pc	315938 ¹⁾
HUD-L 8x60	8 mm	57 mm	200 pc	315939
HUD-L 10x70	10 mm	70 mm	100 pc	315940

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.