


Screw anchor HUS-H 6

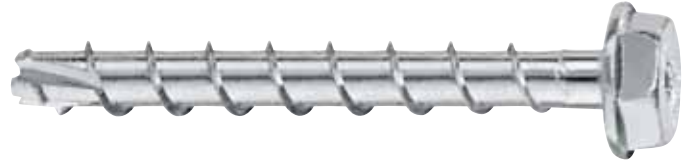

Base materials

- Concrete (aerated)
- Concrete (cracked)
- Concrete (hollow deck)
- Concrete (uncracked)
- Masonry (solid)

Applications

- Piping or ventilation applications where channels are fastened directly to the ceiling
- Suitable for serial applications
- Fastening handrails, railings and other ornamental steelwork

Advantages

- Can be driven directly into the base material
- Neat head design, no further finishing required
- ETA approval - also for cracked concrete


Technical data

Material composition	Steel, zinc-plated (min. 5 µm)
Head configuration	Torx hex head
PROFIS	Yes

Approvals

ETA Fire resistance	ETA-08/0307 for HUS-H & HUS-HR (ETAG 001-3, Option 1)
	ETA-10/0005 for HUS-A, H, I, P, HR (ETAG 001-06, Option -)
Fire resistance	MPA/IBMB for HUS

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

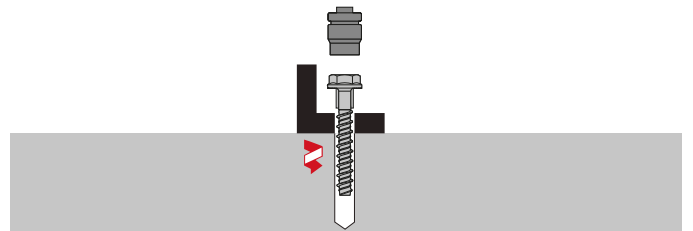

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to www.hilti.com/techlib.

Ordering designation	Drill bit diameter	Anchor size	Anchor length	Base plate clearance hole	Wrench size	Sales pack quantity	Item number
HUS-H 6x40/5	6 mm	6	40 mm	9 mm	13 mm	100 pc	416735¹⁾
HUS-H 6x100/45/65	6 mm	6	100 mm	9 mm	13 mm	100 pc	416738¹⁾
HUS-H 6x120/65/85	6 mm	6	120 mm	9 mm	13 mm	100 pc	416739

¹⁾ This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.