
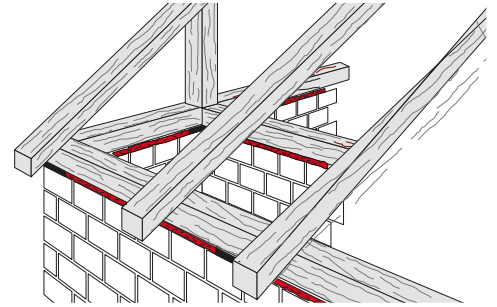


**Insulating foam CF-I 750**

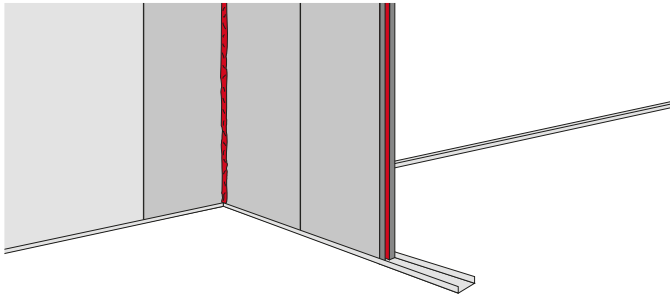

**Applications**

- Insulating window joints, attics, drywall

**Advantages**

- Suitable for universal use
- HFC-free
- Stop-and-go controlled dispensing
- Minimal subsequent expansion

**Technical data**

<b>Approx. density</b>	20 kg/m <sup>3</sup>
<b>Foam yield (up to)</b>	50 l
<b>Approx. cut time (at 23°C / 50% rel. humidity)</b>	25 min
<b>Min. time before loadbearing</b>	Approx. 3-5 h
<b>Application temperature range</b>	5 - 30 °C
<b>Temperature resistance range</b>	-40 - 80 °C
<b>Content per can/cartridge</b>	750 ml
<b>Colour</b>	Manila
<b>Storage and transportation temperature range</b>	5 - 25 °C
<b>Approx. tensile strength</b>	0.05 N/mm <sup>2</sup>



Ordering designation	Sales pack quantity	Item number
CF-I 750	1 pc	369800

Please visit our website for the latest item numbers and related products.