


ø KWIK-CON		d _f [mm]
6.5		8
4.8		6.5

[mm]	h ₁ [mm]	t _{fix}
32	44 - t _{fix}	0...6 mm
44	57 - t _{fix}	0...18 mm
57	70 - t _{fix}	12...31 mm
70	83 - t _{fix}	25...44 mm
83	95 - t _{fix}	38...57 mm
95	108 - t _{fix}	50...69 mm
102	114 - t _{fix}	57...76 mm



ø KWIK-CON			
4.8mm	Kwik-Con II+ Drill Bits	438630 (TE-C SDS) 438634 (Smooth Shank)	438631 (TE-C SDS) 438635 (Smooth Shank)
6.4mm	Kwik-Con II+ Drill Bits	438628 (TE-C SDS) 438632 (Smooth Shank)	438629 (TE-C SDS) 438633 (Smooth Shank)

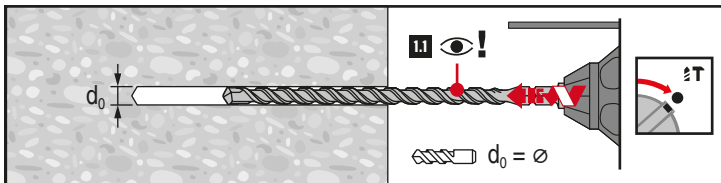